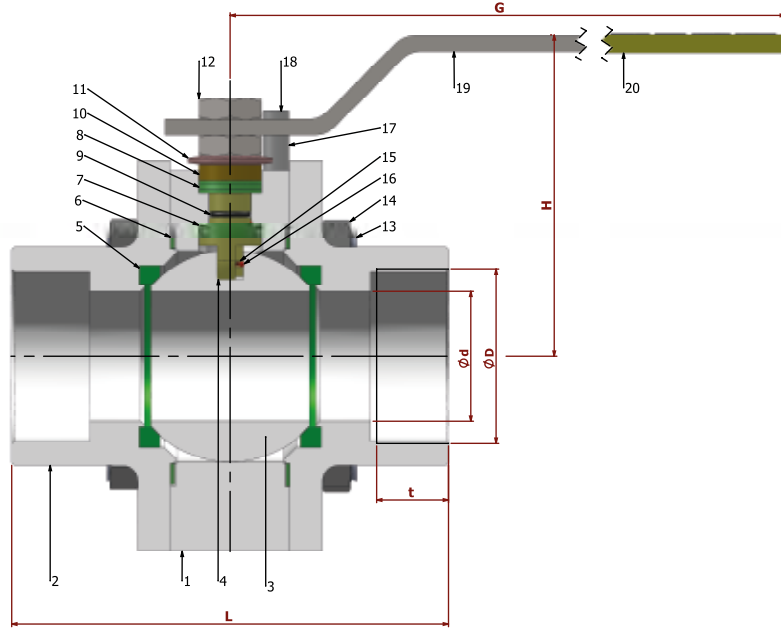


TİP TYPE
BKV-Dİ-RG
R 1/2" - R 2"
PN 100
ÇELİK
STELL
REDÜKSİYONGEÇİŞLİ / DİŞLİ
REDUCED BORE / THREADED


PARÇA NO ITEM NO	PARÇA ADI ITEM DISCRIPTION	MALZEME MATERIAL
20	PLASTİK KAPLAMA PLASTIC COVERING	PVC
19	KÜRE HAREKET KOLU BALL ACTION HANDLE	st 37
18	CİVATA BOLT	ST 42 Gal.
17	STOPLAMA PİMİ STOPPING PIM	ST 42 Gal.
16	ANTİSTATİK KÜRE ANTISTATIC BALL	1.4301.
15	ANTİSTATİK YAY ANTISTATIC SPRING	1.4301.
14	SOMUN NUT	5.6.
13	SAPLAMA STOPPING PIM	4140 - 5141
12	KONTRA SOMUN COUNTER NUT	5,6 Gal.
11	ÇANAK PUL BOWL WASHER	50 Cr V 4
10	BASKI RİNGİ PRESSURE RING	MS 58
9	MİL O-RİNG SPINDLE O-RING	VİTON
8	BURGMAN GRAFİT O-RİNG BURGMAN GRAPHITE O-RING	EN 1514-1
7	BOĞAZ SIZDIRMAZLIK TEFLONU NECK TIGHTNESS ELEMENT	PTFE-Teflon
6	GÖVDE SIZDIRMAZLIK TEFLONU BODY TIGHTNESS ELEMENT	PTFE-Teflon
5	KÜRE SIZDIRMAZLIK TEFLONU BALL TIGHTNESS ELEMENT	PTFE-Teflon
4	HAREKET MİLİ ACTION SPINDLE	1.4021
3	KÜRE BALL	1.4301 / 1.4086
2	KAPAK COVER	SAE 1020
1	GÖVDE BODY	SAE 1020

Boyut : BATUSAN ÖZEL
 Bağlantılar : EN 10226-1
 Çalışma Basıncı : PN 100
 Çalışma Sıcaklığı : -30 °C / .+180 °C

Kullanım Alanları :
 Su, Sıcak Su, Buhar, Basıncılı Hava
 Water, Hot Water, Steam, Pressurized Air


BOYUT ve BAĞLANTI ÖLÇÜLERİ
DIMENSIONS AND CONNECTION SIZES

		PN 100						
		L	G	H	d	D	t	Kg
DN 15	1/2"	110	150	75	12	1/2"	14	--
DN 20	3/4"	130	150	75	15	3/4"	17	--
DN 25	1"	145	150	83	20	1"	20	--
DN 32	1 1/4"	160	180	90	25	1 1/4"	22	--
DN 40	1 1/2"	170	230	95	32	1 1/2"	25	--
DN 50	2"	185	275	115	40	2"	28	--